


- **Wide Band Chokes**

Features:

R6H 6 * 10 * 0.85 -2.5Ts

(1) (2) (3) (4) (5)

- (1) Core Type
- (2) Dimension A
- (3) Dimension B
- (4) Dimension C
- (5) Turns

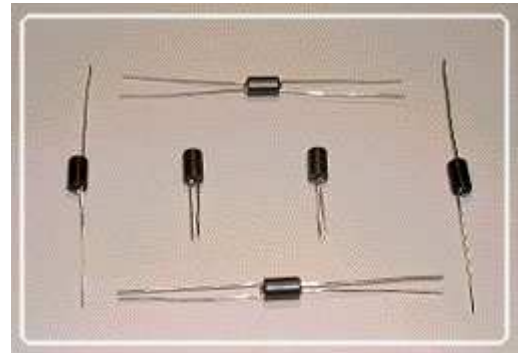

Features:




Fig 1



Fig 2




Fig 3



Fig 4



Fig 5




Fig 6

Dimensions & Typical Specs:

Part Number	A		B		C		Impedance (Ω)		Fig.
	mm	inch	mm	inch	mm	inch	25MHz	100MHz	
R6H 6*10*0.85-1.5Ts	6.00 $\pm$ 0.25	0.236	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	390	460	1
R6H 6*10*0.85-2Ts	6.00 $\pm$ 0.25	0.236	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	510	580	2
R6H 6*10*0.85-2.5Ts	6.00 $\pm$ 0.25	0.236	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	690	680	3
R6H 6*10*0.85-2*1.5Ts	6.00 $\pm$ 0.25	0.236	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	340	450	4
R6H 6*10*0.85-3Ts	6.00 $\pm$ 0.25	0.236	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	860	750	5
R8H 5.2*10*0.85-4Ts	5.20 $\pm$ 0.25	0.205	10.00 $\pm$ 0.40	0.394	0.85 $\pm$ 0.20	0.034	820	706	6

Testing Instrument: HP-4191A